


199.00 EUR  
incl. 19% VAT, plus [shipping](#)

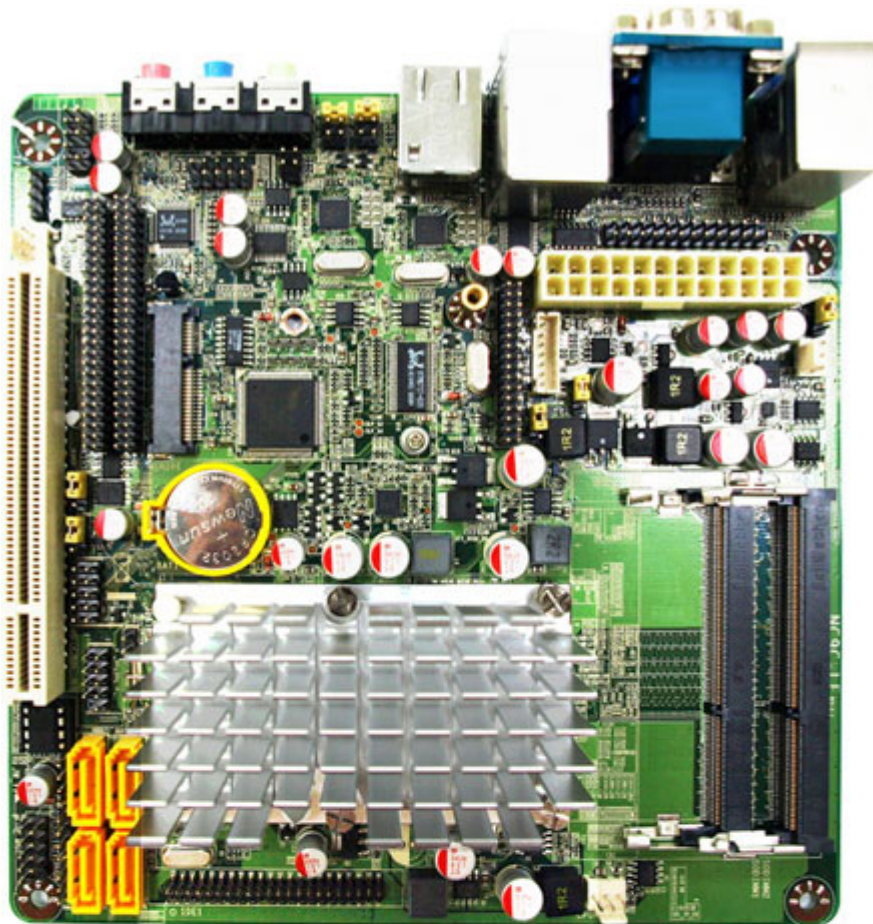

Support:  [Specifications \[EN\]](#)

- INTEL® Pineview-M + NM10 Chipset
- Support INTEL®ATOM N550 Dual-Core (1.50GHz) CPU
- Support 3Gb/s SATA■ with RAID 0, 1 and JBOD
- Supports 2 \* Gigabit LAN

- Integrated VIA VT1705 HD Audio Code with 6-Channel
  - Support Watch dog Technology
  - Compliance with ERP standard
  - Mini-ITX Form Factor(170mm x 170mm)
  - Support Daughter board Expansion
  - **CPU**
    - INTEL®Atom Dual-Core N550 CPU(45nm,FSB 667MHz,1.50GHz,512KB\*2 L2 Cache)
    - INTEL®Atom N550 + NM10 chipset
    - Build-in INTEL®GMA 3150 Graphics Core (DVM T Max. 384MB)
    - 2 \* SO-DIMM Sockets for un-buffered Single Channel DDR3 800 SDRAM up to 2 GB
  - **Chipset**
  - **Memory**
  - **Expansion Slots**
  - **Storage**
  - **Audio**
  - **Ethernet LAN**
  - **USB**
  - **Special Features**
  - **LVDS**
  - **Rear Panel I / O**
  - **Internal I / O**
  - **BIOS**
  - **Functional**
  - **Packing**
  - **Certificate**
  - **Temperature**
  - **Form Factor**
- 1 \* PCI slot
  - 1 \* Mini PCI-E socket
  - 4 \* Serial ATA2 3Gb/s connectors support RAID 0, 1, JBOD
  - 1 \* IDE connector
  - VIA VT1705 HD Audio Code with 6-Channel
  - Realtek RTL8111E PCI-E Gigabit Ethernet LAN
  - Embedded 7 \* USB 2.0/1.1
  - Support ACPI S3
  - Support CPU Smart FAN & DC FAN
  - Onboard 18-bit Single Channel LVDS connector
  - 4 \* USB 2.0/1.1 ports
  - 1 \* PS/2 KB/MS connector
  - 2 \* RJ-45 port
  - 1 \* Audio I/O port ( Line-in, MIC and Line-out )
  - 1 \* VGA port
  - 1 \* COM port
  - 3 \* USB 2.0 ports
  - CPU / Chassis Fan connectors
  - 1 \* 24-pin ATX Power connector
  - 1 \* COM header ( COM2 for RS-232/422/485)
  - 1 \* AUDIO\_IN header
  - 1 \* Parallel header
  - 1 \* GPIO header
  - Award 8MB DIP-SPI Flash ROM
  - ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation, Financial Application
  - Color Box Dimension■200(W) x 200(D) x 70(H)mm
  - Cases Gross Weight■15.4KGS
  - Cases Net Weight■10.3KGS
  - 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
  - CE, FCC, RoHS
  - Operating within 0~60 centigrade (**Suggest to use system FAN**)
  - Storage within -20-85 centigrade
  - Mini ITX Form Factor(170mmx170mm)

**Product Accessories**

- COM cable
- Manual
- CD
- 1x SATA cable
- I/O shield
- 1x IDE cable