




999.00 EUR  
incl. 19% VAT, plus [shipping](#)

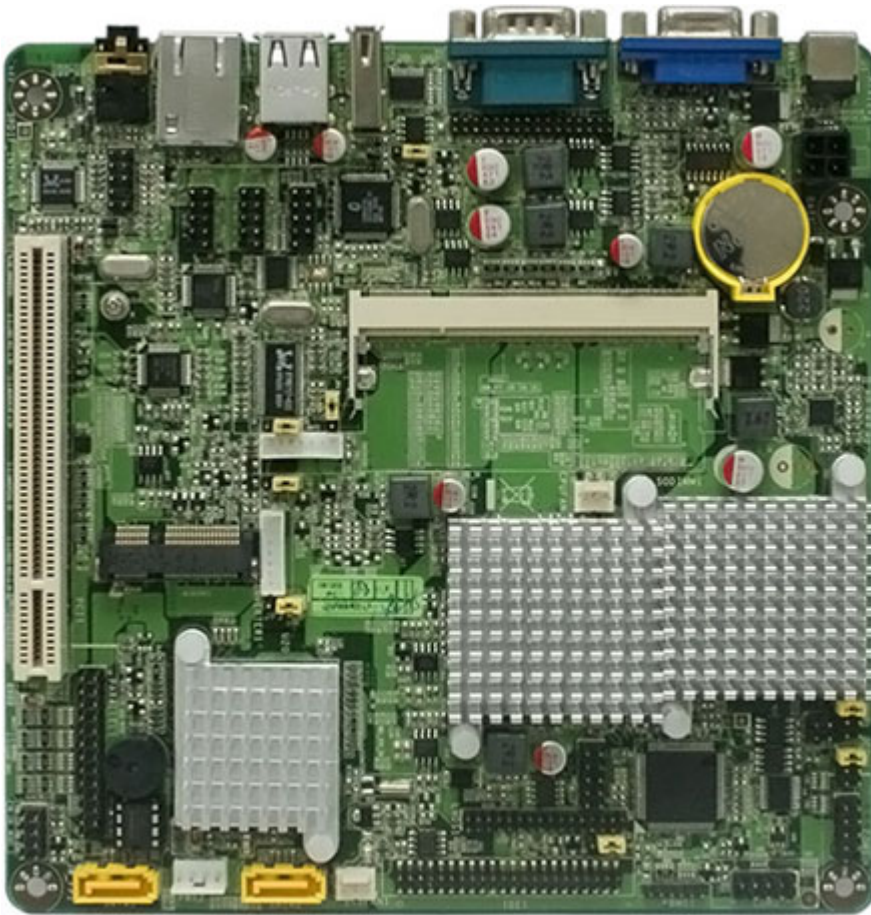

Support:  [Specifications \[EN\]](#)

- INTEL® 945GSE + ICH7M Chipset
- Support INTEL® Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
- Build-in INTEL®GMA 950 Graphics Core
- **Support CPU Smart FAN**
- Integrated LVDS support 24-bit TFT LCD
- Supports 1x Gigabit LAN
- **Supports ACPI S3 Function**
- Support Watch dog Technology
- Mini-ITX Form Factor(17cm x 17cm)
- CPU
  - INTEL ® Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
- Chipset
  - INTEL® 945GSE + ICH7M chipset
  - Build-in INTEL® GMA 950 Graphics Core(Share Memory Size: 128/224MB)
  - Front Side Bus 533MHz
- Memory
  - 1 \* SO-DIMM Sockets for un-buffered Single Channel DDR2 533/400 SDRAM up to 2 GB
- Expansion Slots
  - 1 \* PCI slot
  - 1 \* MINI PCI-E
- Storage
  - 2 \* Serial ATA2 3Gb/s connectors
  - 1 \* Ultra DMA 100 / 66 IDE connector
- Audio
  - Realtek ALC662 6-Channel HD Audio CODEC
- Ethernet LAN
  - Realtek RTL8111DL PCI-E Gigabit Ethernet LAN
- LVDS
  - Onboard 24-bit&8-bit dual channel LVDS connector
- USB
  - Embedded 7 \* USB 2.0/1.1

- 
- Special Features
    - Intel Diamond Ville Platform
    - Support ACPI S3
    - Support CPU Smart FAN
    - Support Watch Dog
  - Rear Panel I / O
    - 3 \* USB 2.0/1.1 ports
    - 1 \* RJ-45 port
    - 1 \* SPDIF OUT
    - 1 \* VGA port
    - 1 \* COM port
    - 1 \* 12V DC in
  - Internal I / O
    - 2 \* USB 2.0/1.1 headers for 4 USB 2.0 ports
    - 1 \* KB/MS headers
    - NB / Chassis Fan connectors;
    - 2 \* LVDS headers & 1 \* GPIO header & 1 Parallel headers
    - 3 \* COM headers ( COM1 for RS-422/485)
    - 1 \* AUDIO header
  - BIOS
  - Functional
  - Form Factor
    - AMI Flash ROM
    - ATM, Security, Digital Signage, POS, General Application, Transportation
    - Mini ITX Form Factor(170mm x 170mm)

**Product Accessories**

- COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield
- 1x IDE cable
- Power cable